


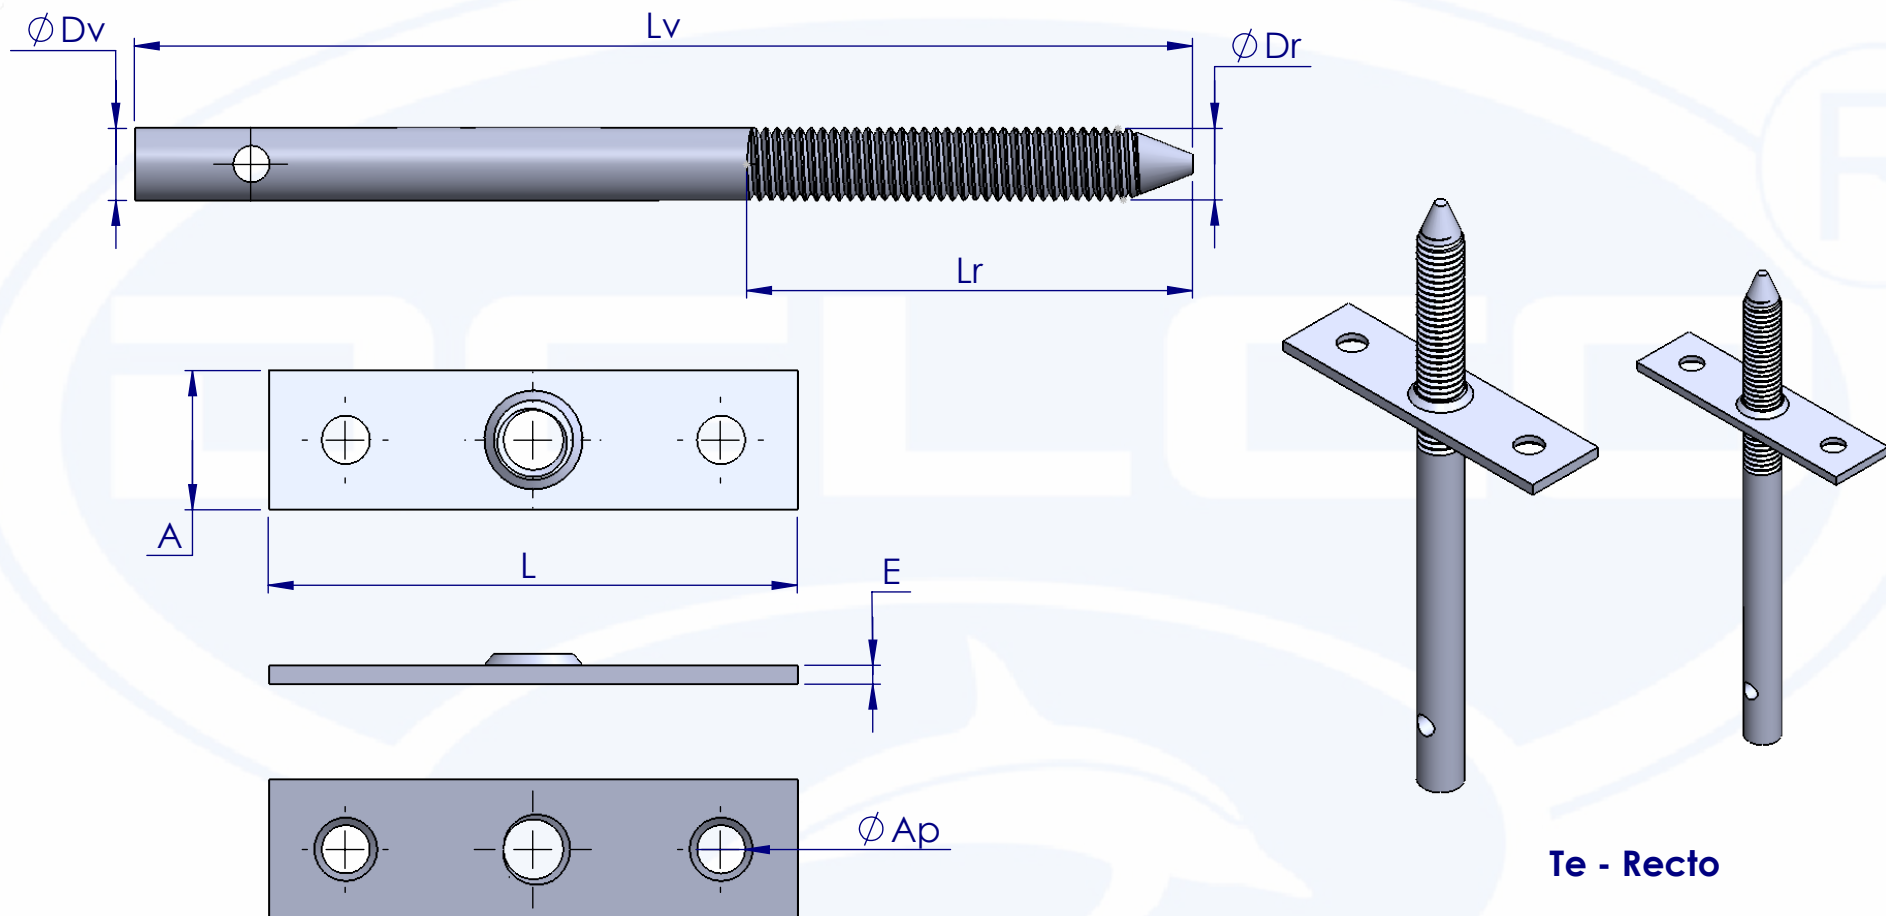

Soporte Invisible 25 cm	70	15	2,5	12	6	Recto	250	60	3/8"	3/8"
Soporte Invisible 18 cm	70	15	2,5	12	6	Recto	180	60	3/8"	3/8"
Soporte Invisible 14 cm	70	15	2,5	12	6	Recto	140	60	3/8"	3/8"
Soporte Invisible 15 cm	61	15	1,9	14	5,5	Recto	150	55	5/16"	5/16"
Soporte Invisible 12 cm	61	15	1,9	14	5,5	Recto	120	55	5/16"	5/16"
REFERENCIA	L - Largo (mm)	A - Ancho (mm)	Ep - Espesor (mm)	Ep - Calibre	ϕAp - Agujero Platina (mm)	TE - Terminación extremos	Lv - Largo vástago (mm)	Lr - Largo rosca (mm)	ϕDv - Diametro vástago (in)	ϕDr - Diametro rosca (in)

Nombre de la pieza		Nombre	Fecha	Material	Proceso	Observaciones	
SOPORTE INVISIBLE	Dibujó	DPÉREZ	10/02/2016	Acero 12L14 acabado galvanizado	Troquelado	Uso en repisas	
	Aprobó	JVÉLEZ	15/02/2016			Unidades mm/in	